



™

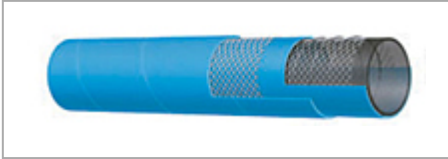
Kuriyama of America, Inc.

360 E. State Parkway
Schaumburg, IL 60173-5335 USA

Phone: (847) 755-0360

Toll-Free FAX: (800) 800-0320

International FAX: (847) 885-0996 **Email:** sales@kuriyama.com

T5090E Acid - Chemical S & D 240 PSI - UHMWPE Meets FDA Requirements Suitable for use with DEF**1**

Series	ID	OD	Max Rec. WP	Vacuum HG	Min. Bending Radius	Weight
<u>T5090E075X100</u>	3/4 in 19 mm	1.22 in 31.0 mm	240 psi	27 inHg	7 1/2 in	0.41 lbs/ft
<u>T5090E100X100</u>	1 in 25 mm	1.46 in 37 mm	240 psi	27 inHg	9 in	0.50 lbs/ft
<u>T5090E125X100</u>	1 1/4 in 32 mm	1.73 in 44 mm	240 psi	27 inHg	10 1/4 in	0.60 lbs/ft
<u>T5090E150X100</u>	1 1/2 in 38 mm	1.97 in 50 mm	240 psi	27 inHg	13 1/4 in	0.68 lbs/ft
<u>T5090E200X100</u>	2 in 51 mm	2.48 in 63.0 mm	240 psi	27 inHg	16 1/4 in	0.91 lbs/ft
<u>T5090E250X100</u>	2 1/2 in 63 mm	3.03 in 77 mm	240 psi	27 inHg	17 1/2 in	1.40 lbs/ft
<u>T5090E300X100</u>	3 in 76 mm	3.62 in 92 mm	240 psi	24 inHg	20 3/4 in	1.91 lbs/ft
<u>T5090E400X100</u>	4 in 102 mm	4.65 in 118 mm	240 psi	24 inHg	26 1/2 in	2.61 lbs/ft
<u>T5090E600X100</u>	6 in 152 mm	6.77 in 172.0 mm	240 psi	24 inHg	40 in	5.28 lbs/ft

