


Guidelines for Connecting EZLink™

1. Prior to connecting, inspect position of coupler tabs, as they will be in the 'same position' once full engagement occurs with coupling connection.



2. Some operators put tabs in 6 o'clock position to allow for a user friendly connection. You can use the hose assembly leverage to assist with connecting and disconnecting.

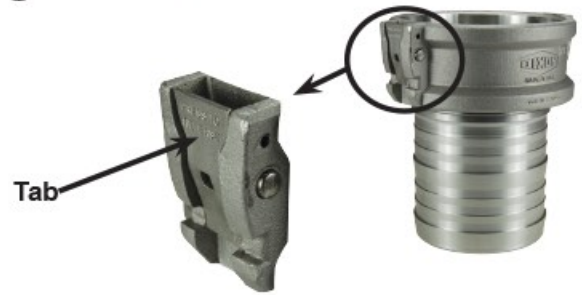

3. **To connect**, push female coupler (Type C) on to a mating male adapter. You should hear the tabs click into groove, and see the tabs move into their original position.

Visually confirm that tabs are in their original position as observed in step 1 of these guidelines.

Once connection is complete, pull on the connection to feel the security of coupling engagement.



Appearance of orange on side of tab indicates the connection is not fully engaged.

4. **To disconnect**, some operators use the hose as a lever when depressing each tab.



Note: Use safety clips or zip ties to lock tabs in place for additional security.



Additional Notes

1. Coupler tabs cannot be pushed to disconnect when pressurized to 20 psi or over.
2. Coupler push tabs can be locked with safety clip and/or zip tie if required.
3. Prior to connecting, inspect the position of the coupler tabs, as they will be in the same position once full engagement occurs with coupling connection.
4. Contact us at (800) 633-2948 for recommended working pressure and temperatures.

Warning: Failure to follow the recommended procedures may result in serious injury and property damage.