



™

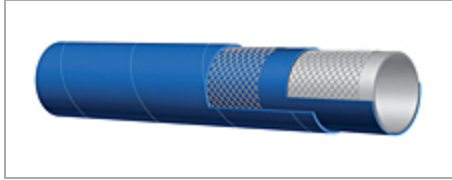
Kuriyama of America, Inc.

360 E. State Parkway
Schaumburg, IL 60173-5335 USA

Phone: (847) 755-0360

Toll-Free FAX: (800) 800-0320

International FAX: (847) 885-0996 **Email:** sales@kuriyama.com

Series T760LE400X100, T760LE - 75 PSI Dry Bulk Food Discharge Hose - FDA Grade

[Applications](#) | [Cover](#) | [Reinforcement](#) | [Tube](#) | [Working Pressure](#) | [Temperature](#) | [Branding](#) | [Standard Length](#) | [Specifications](#) | [Note](#) | [Coupling Suggestions](#)

Applications

-

Application

Discharge or delivery of dry bulk food products

Cover

-

Cover

Blue SBR/EPDM - abrasion and ozone resistant

Reinforcement

-

Reinforcement

Spiralled High Tensile Textile Cords and Static Wire

Tube

-

Tube

3/16" White NR - Abrasion Resistant. Meets FDA requirements.

Working Pressure

-

Working Pressure

Constant Pressure - 5 Bar (75 PSI)

Temperature

Temperature [Min]-30 °C
-22 °F**Temperature [Max]**80 °C
176 °F

Branding

BrandingALFAGOMMA - ITALY T760 5 BAR (75 PSI) - BULK FOOD & MATERIAL
DELIVERY (in white letters)

Standard Length

Standard Length

100 ft

Specifications

Brand

Alfagomma®

ID4 in
102 mm**OD**4.65 in
118 mm**Max Rec. Wp**

75 psi

Weight

2.12 lbs/ft

Series

T760LE

Type

Food Discharge Hose

Style

Dry Bulk Food Discharge Hose

Note

Note

Proper grounding of static wire will prolong tube life.

Coupling Suggestions

Coupling Suggestions

Quick-Acting coupling attached with bands.

Kuriyama offers a full line of Quick-Acting couplings, pin lug shank couplings and combination nipples.

Refer to current Kuriyama-Couplings™ and Accessories Catalog for type and pricing.