



Item # 20130856, PALADIN Petroleum Transfer Hose 2 in x 100 ft, 150 PSI, Black

APPLICATION: Designed as a lightweight and flexible hose to transfer biodiesel and ethanol blends, gasoline and other petroleum products under pressure, gravity flow or medium suction (up to 23" Hg) at ambient temperature. Maximum aromatic content 60%. Outer PVC helix provides abrasion resistance and low coefficient of friction. With Antistatic wire (low resistance).

CONSTRUCTION TUBE: Black Nitrile synthetic rubber (static dissipating)


COVER: Black Chemivic™ synthetic rubber with Orange Pliovic® outer helix

REINFORCEMENT: Synthetic fabric plies

TEMPERATURE: -40 °F to 160 °F (-40 °C to 71 °C)

COUPLINGS: Use Continental Contitech Insta-Lock Cam & Groove Fittings with this product.

BRANDING: Example: Continental Contitech Paladin® Drop Hose (Date Code) Made in Canada.

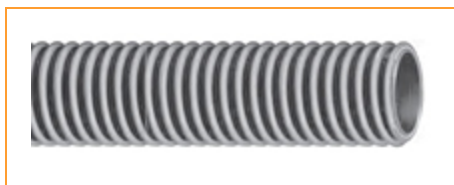

[Product Specifications](#) | [Specifications](#)

Product Specifications

Type	Petroleum Transfer
Style	Petrol Transfer Hose
Construction Tube	Black Nitrile synthetic rubber (static dissipating)
Cover	Black Chemivic™ synthetic rubber with Orange Pliovic® outer helix
Reinforcement	Synthetic Fabric Plies

Color	Black/Orange
Min. Temperature	-40 °F -40 °C
Max. Temperature	160 °F 71 °C
Max. Working Pressure	150.0 psi 1.03 MPa
Brands	PALADIN®
Order Code	543-227

Specifications

I.D.	2 in 50.80 mm
Nom. O.D.	2.870 in 72.90 mm
Length	100.000 ft
Bend Radius	2.000 in 51.00 mm
Vacuum Rating	23.000 inHg 584.00 mmHg
Weight	1.040 lb/ft 1.55 kg/m

MideastUS@contitech.us
1-800-235-4632
Contitech.us

ContiTech