

Hydrolet Valve

QUICK CLEAN STYLE



EXCLUSIVE QUICK CLAMP

SEAMLESS CONSTRUCTION


EASILY CLEANED

The Betts Q.R.B. Quick Clean Hydrolet Valve with the Quick-Removable Bonnet and seamless construction is a valve designed for quick dismantling and easy cleaning. Valve is available in the two styles shown below. Valve comes standard with Teflon disc, packing and gasket.

Pressure & Temperature Rating: 35 PSI and 250°F, maximum working pressure and temperature.

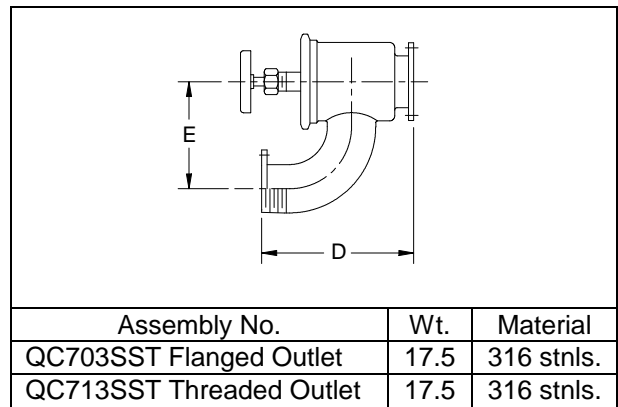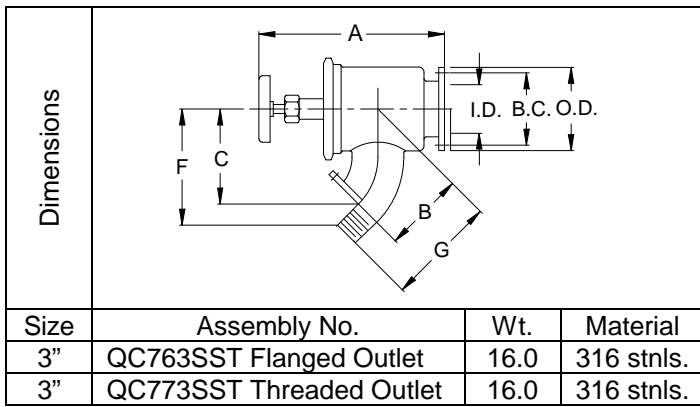

Size	A	B	C	D	E	F	G	Flanged Inlet & Outlet				Thd. Outlet
								I.D.	O.D.	B.C.	Holes	Pipe Size
3"	12½	5½	6 ⁷ / ₁₆	11	7½	7 ¹³ / ₁₆	7½	3 ³ / ₈	5 ⁵ / ₈	4 ⁷ / ₈	8- ⁷ / ₁₆	3"

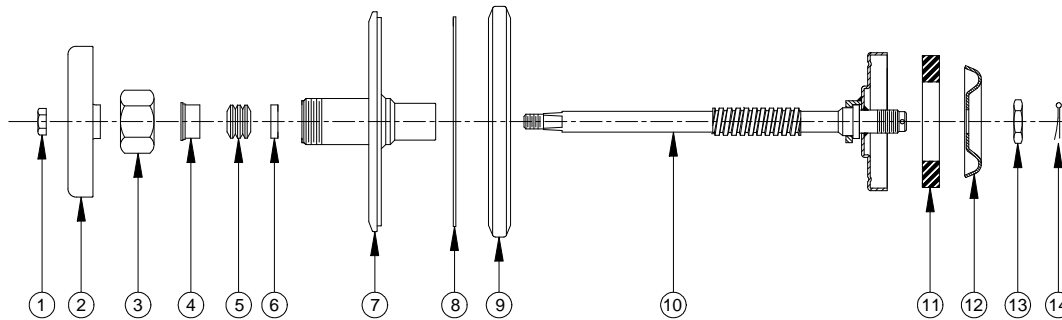

Parts List

No.	Description	Req'd	Material	Part No.	No.	Description	Req'd	Material	Part No.
1	1/16-14UNC-2A Hex Nut	1	Steel	9Q8580	8	Tophead Gasket	1	Teflon	15977TF
2	Handwheel	1	Alum.	25186AL	9	Clamp Ring Assembly	1	Stnls.	25683SL
3	Stuffing Box Nut	1	Stnls.	15026SL	10	Disc Holder & Stem Assembly	1	Stnls.	17683SS
4	Top Gland	1	Stnls.	15220SS	11	Disc	1	Teflon	15202TF
5	Teflon Packing	1	Teflon	19649TF	12	Disc Retainer Plate	1	Stnls.	17028SS
6	Bottom Gland	1	Stnls.	15076SS	13	Disc Plate Nut	1	Stnls.	15204SS
7	Tophead & Bonnet	1	Stnls.	16126SS	14	1/8x 1 Cotter Pin	1	Stnls.	9Q5867

NOTE: For complete replacement sub-assembly (items 1-14) order Part No. WV17625SST.